



A N N A



MADE IN ITALY

Materiali:

- Collettori verticali in acciaio al carbonio verniciato semiovali 30x40 mm
- Corpi radianti orizzontali in acciaio al carbonio verniciato ø 25 mm

Dati tecnici:

Pressione di esercizio: 8 bar - Temperatura massima :110 °C

Kit di fissaggio:

Kit di fissaggio conformi VDI 6036 Classe 1-2-3-4, a garanzia di massima tenuta, sicurezza e stabilità del termoarredo. I kit sono comprensivi di supporti, valvolina di sfianto, chiave esagonale, tasselli e viti per fissaggio, idonei per impiego su pareti compatte o in laterizio forato. Per una corretta installazione riferirsi sempre alle istruzioni di montaggio a corredo.

Imballo:

Il radiatore viene protetto con profili ed angolari in cartone, e film di polietilene termoretraibile riciclabile. Istruzioni uso e manutenzione a corredo.

Verniciatura:

A polveri epossipoliesteri ecologiche con processo certificato DIN 55900-1;2.

Colore:

Colore standard Bianco RAL 9010. Per altri colori consultare la tabella colori.

Material:

- Vertical collectors in painted mild steel semi oval 30x40 mm
- Horizontal heating elements in painted mild steel ø 25 mm

Technical data:

Max pressure : 8 bar - Max temperature: 110 °C

Fixing kit:

The fixing kit is in compliance with norm VDI 6036 Class 1-2-3-4 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, Airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.

Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

Painting process:

Painted with ecological epoxy powders. (Certificate DIN 55900-1;2)

Colour:

Standard Pure white RAL 9010. Other colours see colour chart.

ANNA

Altezza Height H [mm]	Largh. Width L [mm]	Interasse Pipe Centres I [mm]	INTERASSE STANDARD STANDARD PIPE CENTRES	INTERASSE 50 mm 50 mm PIPE CENTRES	Kit misto Dual energy kit	
			Codice Code nr.	Codice Code nr.	$\Delta t=50^{\circ}\text{C}$ [Watt]	[Watt]
840	400	350	3551686100001	3551686100017	325	400
	450	400	3551686100005	3551686100021	358	400
	500	450	3551686100009	3551686100025	392	500
	550	500	3551686100041	3551686100033	426	500
	600	550	3551686100013	3551686100029	458	600
	750	700	3551686100045	3551686100037	573	600
1160	400	350	3551686100002	3551686100018	429	600
	450	400	3551686100006	3551686100022	472	600
	500	450	3551686100010	3551686100026	515	700
	550	500	3551686100042	3551686100034	557	700
	600	550	3551686100014	3551686100030	600	700
	750	700	3551686100046	3551686100038	728	900
1454	400	350	3551686100003	3551686100019	534	700
	450	400	3551686100007	3551686100023	586	700
	500	450	3551686100011	3551686100027	639	700
	550	500	3551686100043	3551686100035	692	900
	600	550	3551686100015	3551686100031	744	900
	750	700	3551686100047	3551686100039	902	900
1775	400	350	3551686100004	3551686100020	660	900
	450	400	3551686100008	3551686100024	725	900
	500	450	3551686100012	3551686100028	789	1200
	550	500	3551686100044	3551686100036	855	1200
	600	550	3551686100016	3551686100032	919	1200
	750	700	3551686100048	3551686100040	1114	1200

I codici in tabella si riferiscono ai modelli di colore BIANCO R01
Code nr. are referred to colour PURE WHITE R01


ACCESSORI / ACCESSORIES



Kit valvole kristal a squadra
termostattabile
Kristal square valve kit with thermostatic
option



Teste termostatiche
Thermostatic heads

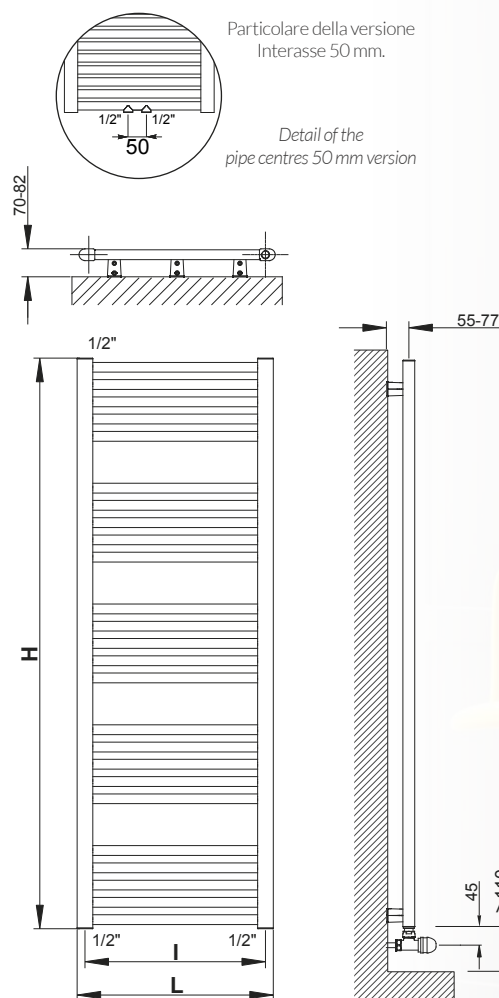

Misure valide per valvole
Kristal Cordivari

Quotes for Cordivari
Kristal valves

ANNA

NEW



COLOURS


LUCIDI
GLOSSY




OPACHI
MATT



NEW




MELANGE



SPECIAL FINISHING



WAVY



Per l'esatta consultazione delle tinte riferirsi alla cartella colori Cordivari.
In order to see the real colour, please refer to the Cordivari Colours Chart.

11/2016 6301385400050 IT-EN



CORDIVARI srl

Zona Industriale Pagliare - 64020 Morro D'Oro - (TE) - ITALY

